


Welcome

Thank you very much for purchasing DitoGear™ motion control equipment. We hope that the devices will meet your expectations bringing a great value to your productions.

We really strive for delivering the best unboxing and equipment usage experience. If we (or someone else) failed at some point, just let us know and we'll do our best to fix it promptly.



Here's where to get started.
» ditogear.com/welcome

More resources

Latest user manuals are available at
» ditogear.com/user-manuals

For advanced connection diagrams check
» ditogear.com/charts

In case you need further assistance contact us at
» ditogear.com/support

Connection Diagram for OmniHead

1. Signal cable


Connect two RJ45 type signal cables to Dragonframe Master Controller (DMC-16) and to **CH1 IN & CH2 IN** ports of a DitoGear™ DMC-16 Adapter.

2. Signal cable

Connect an RJ45 type signal cable to DitoGear™ OmniHead and to **CH1 OUT** port of a DitoGear™ DMC-16 Adapter.

3. Power

Connect the power source – a DitoGear™ PowerPack 7Ah/14Ah, a DitoGear™ AC/DC power adapter or a 3rd party compatible power source to power port of DitoGear™ DMC-16 Adapter.

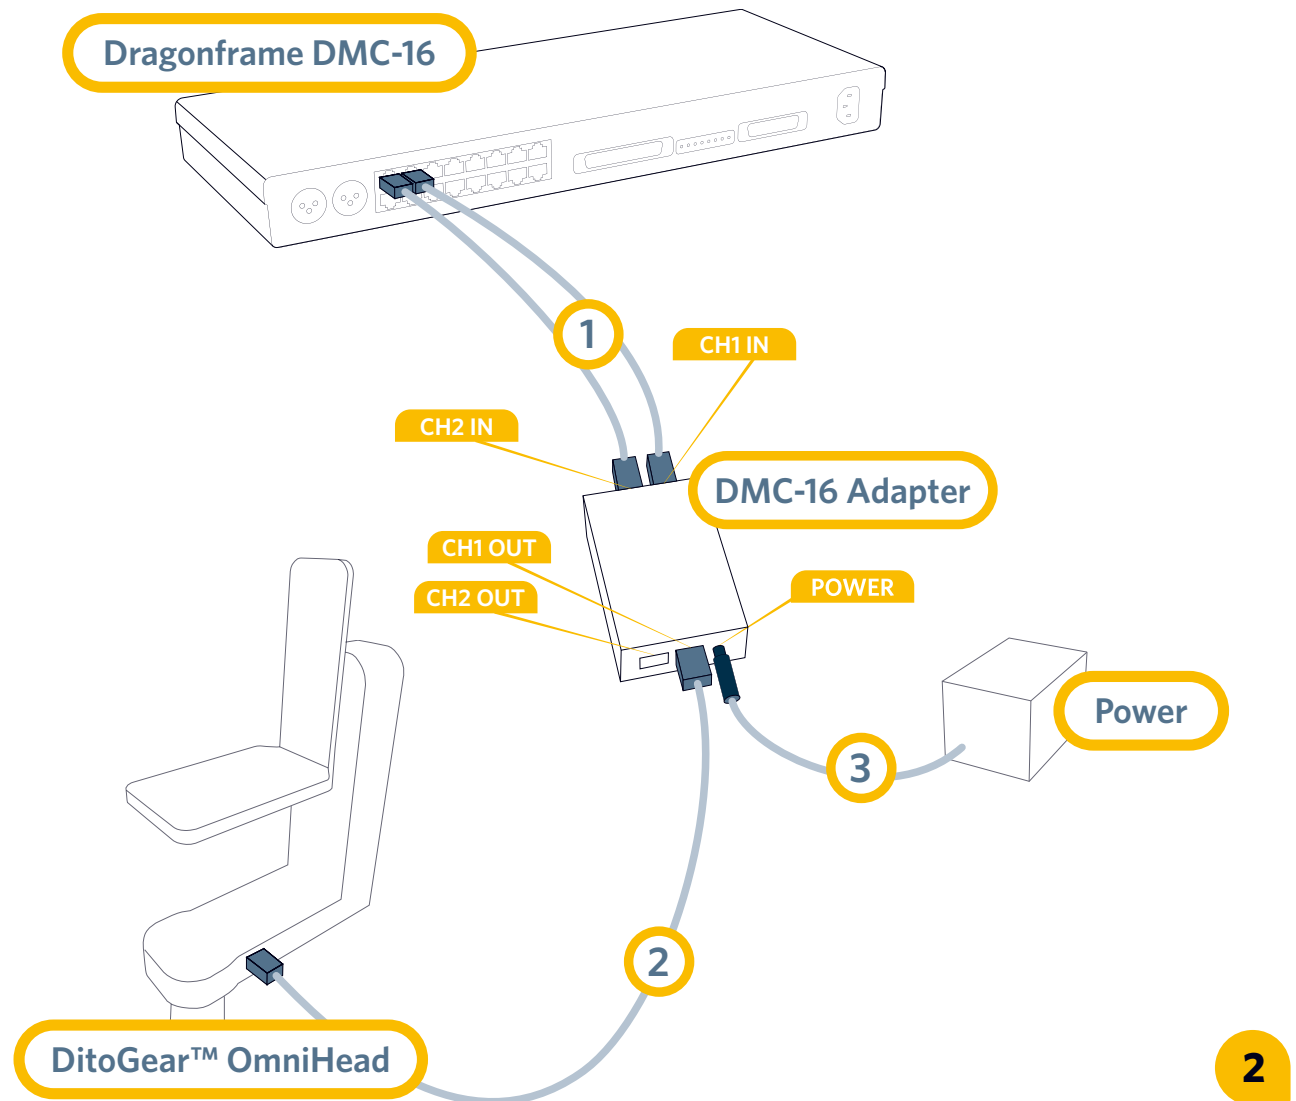

DitoGear™ DMC-16 Adapter

Quick Start Guide

Connection Diagram for 1-Axis DitoGear™ Hardware

1. Signal cable

Connect two RJ45 type signal cables to Dragonframe Master Controller (DMC-16) and to **CH1 IN & CH2 IN** ports of a DitoGear™ DMC-16 Adapter.


2. Signal cable

Connect an RJ45 type signal cable to DitoGear™ hardware and to **CH1 OUT** port of a DitoGear™ DMC-16 Adapter.

Use **CH2** (IN & OUT) for the 2nd 1-axis DitoGear™ device.

3. Power

Connect the power source - a DitoGear™ PowerPack 7Ah/14Ah, a DitoGear™ AC/DC power adapter or a 3rd party compatible power source to power port of DitoGear™ DMC-16 Adapter.

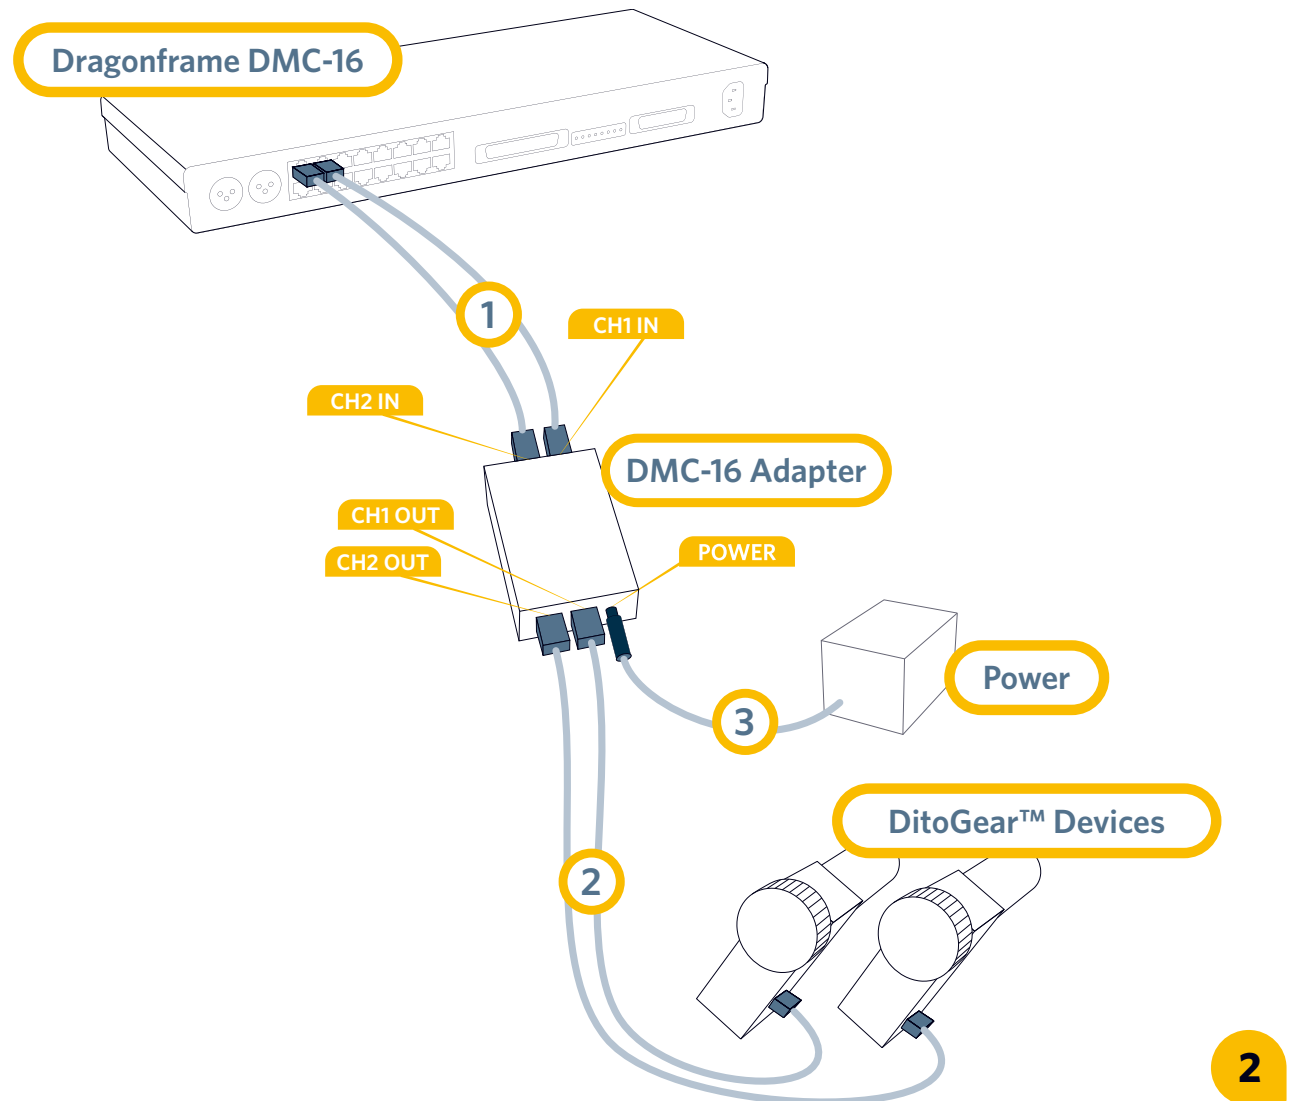

DitoGear™ DMC-16 Adapter

Quick Start Guide

Connection Diagram for OmniSlider

1. Signal cable

Connect RJ45 type signal cable to Dragonframe Master Controller (DMC-16) and to **CH1 IN** port of a DitoGear™ DMC-16 Adapter.

2. Signal cable

Connect an RJ45 type signal cable to DitoGear™ OmniSlider and to **CH1 OUT** port of a DitoGear™ DMC-16 Adapter.

3. Power

Connect the power source – a DitoGear™ PowerPack 7Ah/14Ah, a DitoGear™ AC/DC power adapter or a 3rd party compatible power source directly to DitoGear™ OmniSlider Power port.

For low-payload operation, you can alternatively connect the power to the Power port of the DMC-16 Adapter (dashed line).

